

◆ CONTACT US :

Address : Villa 18 - El khalifa El wasiq - Abass el Akkad


Branches : El Rehab branch : 177 commercial Market EL Rehab
Nacr City : 17 st Mostafa Elnahas
6 October : G 7,Prima Vista Mall beside CIB bank El hosary square
EL Monofia : 31 Axis Services of the second district

E-mail : sales@zerotechegypt

Website : www.zerotechegypt.com

Hot Line : 16105

ZEROTECH
YOUR TRUSTED BRAND



◆ SMART SECURITY SYSTEMS





About Us

Our trusted experience combined with the quality and reliability of our integrated security systems allows customers to meet their existing and emerging security challenges.

We attribute our success to our R&D initiatives, a wide portfolio of product and solutions sensitivity towards our customers' needs, and by delivering the best value propositions.

We offer end-to-end security solutions and have achieved amazing success across a wide range of industry verticals including retail transportation, education banking, healthcare, hospitality

Since 2002,

ZEROTECH has developed a reputation for being an innovative designer, developer of security hardware, software. We provide to our customers with industry-leading security systems including video surveillance systems, fire alarm, intrusion alarm, finger print and access control, home automation, video intercom, sound system.

ZEROTECH products pass stringent quality control tests and carry international certifications such as UL, CE, FCC, etc

That's not all; our internationally recognized ISO certifications ensure that ZEROTECH has the essential processes and systems in place to meet the most daunting and demanding requirements of the global security industry. In effect to constantly putting effort for establishing, implementing, maintaining and continually improving an information security management system, it has been recently ISO/9001 2015

Our Clients



Our Clients



Our Clients



Our Clients



Our Clients





TOTAL SECURITY

IN ONE SOURCE



Security Cameras



Korean Line

AHD SYSTEM



ZTG-S2MD

2.1Megapixel CMOS SONY Sensor "1/2.9 "
FULL HD 1080P
AHD, TVI, CVI, CVBS
DWDR
24EA UP TO 25 M IR DISTANCE



ZTG-S2MVD

2.1Megapixel SONY Exmor CMOS "1/2.9 "
Varifocal Lens 2.8~12mm
FULL HD 1080P
30EA up to 30 M IR DISTANCE
OSD CONTROLLER OPTION
3-Axis Structure
4IN1 Solution/ DWDR



ZTG-S2MB

2.1Megapixel CMOS SONY Sensor "1/2.9 "
FULL HD 1080P
AHD, TVI, CVI, CVBS
Up to 30M IR DISTANCE
DWDR



ZTG-S2MVB

2.1Megapixel Sony Exmor CMOS "1/2.9 "
FULL HD 1080P
AHD, TVI, CVBS
up to 50 M IR Distance
IR LED : 48EA up to 50 M IR Distance
DWDR





ZTG-S2MVB-AF

2.1Megapixel SONY Exmor CMOS "1/2.9 "
Motorized Auto-Focus Varifocal Lens 2.7~12mm
Full HD 1080P
IR LED : 48EA UP TO 40 M IR DISTANCE
Built in OSD Controller
5-Axis Bracket Structure
AHD / TVI / CVI / CVBS Output /DWDR



ZTG-LPR

2.1Megapixel SONY Exmor CMOS "1/2.9"
Varifocal Lens 5~50mm
Full HD 1080P
IR LED : 6EA UP TO 40 M IR DISTANCE
Built in OSD Controller
HD-SDI / TVI Output



ZTG-S4MB

4Megapixel CMOS "1/3"
FULL HD 1080P
AHD, TVI
0.01Lux
UP TO 30 M IR DISTANCE
Quad HD 1440p
DWDR



ZTG-S4MD

4Megapixel CMOS "1/3"
AHD, TVI
0.01Lux
Quad HD 1440p
DWDR
UP TO 25M
24PCS UP TO 25 M IR DISTANCE



ZTG-DVR4CH-1080P

2M High resolution recording
Multiple Auto search / AHD, TVI, CVI, IP, ANALOG
HDMI & VGA simultaneously supported / POS / ATM available
monitor screen supported 16:9 / Android , iPhone App supported
Dual Codec for Network transmission/HDD status Check available
Audio Input&output 4ch /Video Input 4ch
Sensor Input 4ch /rely output 1 rely /SATA HDD 1EA

Digital video Recorders





ZTG-DVR8CH-1080P

2M High resolution recording / Android , iPhone App supported
Multiple Auto search/ AHD, TVI, CVI, IP, ANALOG
HDMI & VGA simultaneously supported / POS / ATM available
monitor screen supported 16:9
Dual Codec for Network transmission / HDD status Check
available / Audio input&output 8ch RCA / video input 8ch
Sensor Input 4ch / relay output 1 relay / SATA HDD 1EA



ZTG-DVR16CH-1080P

1080p High resolution recording / Video input : 16ch
Multiple Auto search / SATA HDD 2EA / iPhone App supported
HDMI & VGA simultaneously supported / POS / ATM available
monitor screen supported 16:9 / , Android
HDD status Check available / Dual Codec for Network
transmission / Audio input: 16 8 RCA + 8 DB15 Audio output :1RC
Sensor Input: 16 NC, NO selectable / Relay Output 1 Relay Alarm



ZTG-DVR4CH-4M

4M High resolution recording / SATA HDD 1EA
Multiple Auto search / (AHD, TVI, CVI, IP, ANALOG
HDMI & VGA simultaneously supported / POS / ATM available
monitor screen supported 16:9 / Android, iPhone App supported
HDD status Check available / Dual Codec for Network
transmission / Audio input / output :4ch RCA 1 RCA
Sensor output 4 ch / relay output 1 relay / Video input : 4 channel



ZTG-DVR8CH-4M

Multiple Auto search / AHD, TVI, CVI, IP, ANALOG
4M High resolution recording / DISPLAY : 4K
HDMI & VGA simultaneously supported / POS / ATM available
monitor screen supported 16:9
HDD status Check available / Dual Codec for Network
transmission / Audio input / output :8ch RCA 1 RCA
SATA HDD 1EA / Sensor output 8 ch / relay output 1 relay
Android , iPhone App supported / Video Input :8CH



ZTG-DVR16CH-4M

Multiple Auto search / AHD, TVI, CVI, IP, ANALOG
4M High resolution recording / DISPLAY : 4K / Video input :16ch
HDMI & VGA simultaneously supported / POS / ATM available
monitor screen supported 16:9
HDD status Check available / Dual Codec for Network
transmission / Audio input / output :16ch RCA 1 RCA
Android, iPhone App supported
Sensor output 16 ch / relay output 1 relay / SATA HDD 2EA





ZTGIP-D2M

Sony 1/2.9 Exmor CMOS Sensor
2.8mm Megapixel Lens
Full HD 1080P
3-Axis structure
UP TO 25 M IR DISTANCE
H.264
PoE Power over Ethernet



ZTGIP-ADAF2M-MIR

Sony 1/2.8 STARVIS CMOS Sensor
Motorized Lens with IRIS 2.7 - 12MM
Full HD 1080P
3-Axis structure
UP TO 40 M IR DISTANCE
H.264/H.265
PoE Power over Ethernet /Onvif



ZTGIP-BT2M

Sony 1/2.8 STARVIS CMOS Sensor
3.6mm Fixed Lens with ICR
Full HD 1080P
3-Axis structure
UP TO 40M IR
H.264/H.265
PoE Power over Ethernet/ Onvif



ZTGIP-BV2M

Sony 1/2.9 Exmor CMOS Sensor
VARIFOCA LENS 2.7 - 12MM
Full HD 1080P
3-Axis structure
Up to 40 M IR DISTANCE
H.264
PoE Power over Ethernet



ZTGIP-ABAF2M-MIR

Sony 1/2.8 STARVIS CMOS Sensor
Motorized Lens with IRIS 2.7 - 12MM
Full HD 1080P
3-Axis structure
UP TO 50 M IR DISTANCE
H.264/H.265
PoE Power over Ethernet /Onvif





ZTGIP-DV4M

Omnivision 1/3 CMOS Sensor
DC-IRIS Lens 2.8 - 12MM
3-Axis structure / 4Mega Pixel
ICR Filter Change Function
H.264/H.265 /PCS up to 30 M IR 30
PoE Power over Ethernet/ Onvif
IR led : 48 EA up to 30 M IR Distance



ZTGIP-B4M

Omnivision 1/3 CMOS Sensor
3.6mm Fixed Lens / 4Mega Pixel
3-Axis structure
ICR Filter Change Function
H.264/H.265 /pcs up to 40 M IR 48
PoE Power over Ethernet / Onvif
IR led : 48 EA up to 40 M IR Distance



ZTGIP-BV4M

Omnivision 1/3 CMOS Sensor
DC-IRIS Lens / 4Mega Pixel 2.7 - 12MM
3-Axis structure
ICR Filter Change Function
H.264/H.265 /led up to 50 M IR distance 48
PoE Power over Ethernet /Onvif
IR led : 48 EA up to 50 M IR Distance



ZTGN-9CH4POE

9 CH NVR
Control any ONVIF Camera's Setup and Features Remotely
Mobile Witness turns a smartphone or tablet into an additional surveillance camera /Automatic Device Discovery
Max. throughput 80 Mbps /Max. HDD bay 1 x SATA HDD
Record and manage single-sensor IP cameras up to 4K
IEEE 802.3 at : Auto Power Distribution to each PoE Port
Alarm Input/ Relay Output 4 Ch/ 1 Ch / No. of PoE 4 Ch



ZTGN-16CH8POE

16CH NVR
Control any ONVIF Camera's Setup and Features Remotely
Mobile witness™ turns a smartphone or tablet into an additional surveillance camera / Automatic Device Discovery
iSCSI function Support – External HDD through Network
IEEE 802.3 at : Auto Power Distribution to each PoE Port
Max. 30W/PoE Port / Monitor and Record up to 4K
Alarm Input / Relay Output 4 Ch / 1 Ch / No. of PoE 8 Ch





ZTGN-16POE

16CH NVR

Complete installation, setup and camera configuration in under / three minutes / POS via TCP and USB-seria

Record and manage single-sensor IP cameras up to 4K

IEEE 802.3 at : Auto Power Distribution to each PoE Port

Max. HDD bay 4 x SATA HDD / Max. 30W/PoE Port

No. of PoE 16 ch / Alarm input / relay output 4 Ch / 1 Ch



ZTGN-36CH

36Ch Real Time Display and Real time Recording

Intelligent Dual(Main & Sub) Stream Recording/Display

Throughput 200Mbps for 36Ch

Zero Configuration Supported /No. of PoE None

H.264 I-Reference Supported

Max. HDD Bay 9 x SATA HDD

Throughput Max. Bandwidth 200Mbps



ZTGN-64CH

64Ch Real Time Display and Real time Recording

H.264 I-Reference Supported / 320Mbps for 64Ch

Max. HDD Bay 12 X SATA HDD

Sensor in /Relay Output 16Ch / 4 Ch

Zero Configuration Supported / No. of PoE None

P2P Function that doesn't require Port Forwarding

iSCSI function Support – External HDD through Network

Chinese Line



ZT-901

2MP CMOS Sensor 1/2.7

2MP 1080P/ 960H

2.8mm

14μ x 18PCS

IR Distance 20M

Plastic / DWDR

4 in 1 " AHD /CVI /TVI /CVBS"





ZT-S200

SONY 2.1MP CMOS Sensor 1/2.9 "
2MP 1080P/ 960H
2.8mm
14μ x 18PCS
DWDR / 20M IR Distance
Metal, IP66
4 In 1 "AHD - CVI -TVI CVBS "



ZT-SVD200

SONY 2.1MP CMOS Sensor 1/2.9 "
2MP 1080P/ 960H
2.8-12mm
LED 36
DWDR / 30M IR Distance
Metal, IP66
4 In 1 "AHD - CVI -TVI CVBS "



ZT-601

2MP CMOS Sensor 1/2.7 "
2MP 1080P/ 960H
3.6mm 2.8mm/6mm Optional
14μ x 18PCS
DWDR / 20M IR Distance
Plastic, IP66
4 In 1 "AHD - CVI -TVI CVBS "



ZT-S300

SONY 2.1MP CMOS Sensor 1/2.9 "
2MP 1080P/ 960H
3.6mm
42μ x 2PCS
DWDR / 30M IR Distance
4 In 1 "AHD - CVI -TVI CVBS
Metal, IP66



ZT-SB2M-AF

SONY Starvis Back-illuminated CMOS Sensor/ Starlight 1/2.8 "
AHD/CVI/TVI/CVBS 4 IN 1
2.7-13.5mm Motorized Lens
IR Distance max 40m
IP66 outdoor, OSD&UTC support
True WDR
2M:1920*1080 / 42μ x 4PCS





ZT-SVB200

SONY 2.1MP CMOS Sensor 1/2.9
2MP 1080P/ 960H
2.8-12mm
4PCS 40M IR Distance
DWDR
Metal, IP66
4 In 1 "AHD - CVI -TVI CVBS "



ZT-SVB200-60mIR

SONY 2.1MP CMOS Sensor 1/2.9
2MP 1080P/ 960H
2.8-12mm
6PCS 60M IR Distance
DWDR
Metal, IP66
4 In 1 "AHD - CVI -TVI CVBS "



ZT-5MD

CMOS Sensor 1/2.5
AHD/CVI/TVI/CVBS 4 IN 1
2.8mm Fixed Lens
IR Distance Max. 20m
Indoor Use, OSD&UTC Support
DWDR
14μ x 18PCS



ZT-SD5M

SONY Starvis Back-illuminated CMOS sensor 1/2.9
AHD/CVI/TVI/CVBS 4 IN 1
2.8mm Fixed Lens
IR Distance max 20m
IP66 outdoor
OSD&UTC support
5MP / DWDR



ZT-SVD5M

SONY Starvis Back-illuminated CMOS sensor 1/2.9
AHD/CVI/TVI/CVBS 4 IN 1
2.8-12mm Varifocal Lens
IR Distance max 30m
IP66 outdoor, OSD&UTC support
5MP
DWDR





ZT-5MB

CMOS Sensor 1/2.5"
AHD/CVI/TVI/CVBS 4 IN 1
5M@20fps/12.5fps, 4M@30fps/15fps, 2M@30fps; CVI: 4M@30fps
2M@30fps /3.6mm Fixed Lens
IR Distance Max. 20m
IP66 Outdoor
DWDR / OSD&UTC Support



ZT-S600

SONY 6MP Starvis Back-illuminated CMOS sensor "1/2.9 "
5MP
3.6mm
42μ x 2PCS 30M IR Distance
DWDR
Metal, IP66
4 In 1 "AHD - CVI -TVI CVBS "



ZT-SB5M

SONY Starvis Back-illuminated CMOS sensor"1/2.9 "
AHD/CVI/TVI/CVBS 4 IN 1
3.6mm Fixed Lens
IR Distance max 30m
IP66 outdoor, OSD&UTC support
42μ x 2PCS/Metal, IP66
DWDR /5MP



ZT-SB5M-AF

SONY Starvis Back-illuminated CMOS Sensor/ Starlight 1/2.8 "
AHD/CVI/TVI/CVBS 4 IN 1
2.7-13.5mm Motorized Lens
IR Distance max 40m
IP66 outdoor, OSD&UTC support
True WDR
5M :2592 x 1944



ZT-SVB5M

SONY Starvis / Back-illuminated CMOS 1/2.8 "
sensor 8 mega pixel 4k/ AHD/CVI/TVI/CVBS 4 IN 1
2.8-12mm Varifocal Lens
IR Distance Max. 40m
IP66 Outdoor, OSD&UTC
Support
DWDR





ZTD-4CH1080P-H.265

Support H.265+ encoding, ultra-low bitrates, compatible with H.264 surroundings / Support ONVIF; access third party Support UTC, control signal& video stream transmit through one single coaxial /Browsers: Support IE\ Chrome\ Firefox Safari browsers /Video Input 4ch BNC Video Output 1ch HDMI, 1ch VGA HDD 1*SATA Up to 8TB



ZTD-8CH1080N-H.265

Support H.265 encoding, ultra-low bitrates, compatible with H.264 surroundings / Support ONVIF; access third party Support UTC, control signal& video stream transmit through one single coaxial /Browsers: Support IE\ Chrome\ Firefox Safari browsers /Video Input 8ch BNC HDD 1*SATA Up to 8TB Audio I/O 4CH RCA input/ 1CH RCA output



ZTD-16CH1080N-H.265

Support H.265 encoding, ultra-low bitrates, compatible with H.264 surroundings / Support ONVIF; access third party Support UTC, control signal& video stream transmit through one single coaxial / Browsers: Support IE\ Chrome\ Firefox Safari Video Output 1ch HDMI, 1ch VGA HDD 1*SATA Up to 8TB Video input 16ch BNC



ZTD-4CH5MP-H.265

Support H.265+ encoding, ultra-low bitrates, compatible with H.264 surroundings / Support ONVIF; access third party Support UTC, control signal& video stream transmit through one single coaxial /Browsers: Support IE\ Chrome\ Firefox Safari Video Input 4ch BNC /Video Output 1ch HDMI, 1ch VGA HDD 1*SATA Up to 8TB Audio I/O 4CH RCA input/ 1CH RCA output



ZTD-8CH5MP-H.265

Support H.265+ encoding, ultra-low bitrates, compatible with . H.264 surroundings / Support ONVIF; access third party Support UTC, control signal& video stream transmit through one single coaxial / Browsers: Support IE\ Chrome\ Firefox Safari Video Input 8ch BNC / Video Output 1ch HDMI, 1ch VGA Audio I/O 4CH RCA input/ 1CH RCA output HDD 1*SATA Up to 8TB





ZTD-16CH5MP-H.265

Support H.265 encoding, ultra-low bitrates, compatible with H.264 surroundings / . Support ONVIF; access third party Support UTC, control signal& video stream transmit through one single coaxial / . Browsers: Support IE\ Chrome\ Firefox Safari Video Input 16ch BNC / Video Output 1ch HDMI, 1ch VGA / HDD 1*SATA Up to 8TB
Audio I/O 2CH RCA input/ 1CH RCA output



ZTD-32CH5MP-H.265

Support H.265 encoding, ultra-low bitrates, compatible with H.264 surroundings; 4M-N/5M-N /series real-time encoding Support ONVIF; access third party; perfect protection circuit unique triple watchdog function / Support UTC, control signal & video stream transmit through one single coaxial Video Input 32ch BNC /HDD 2*SATA Up to 8TB for each disk Video Output 1ch HDMI, 1ch VGA Full HD Output



ZTIPD-F2M

CMOS Sensor "1/2.7
2MP 1080P
H.264/H.264+/JPEG/AVI /MJPEG
2.8mm /Support ONVIF 2.4
14μ x 18PCS
Rectangular Zone/ 20M 3
DWDR / Metal , IP66



ZTIPD-ST2M-AF

SONY Starvis Back-illuminated CMOS Sensor HISILICON"1/2.8
Hi3516C/Starlight /3MP HD Lens / 3MP HD Lens
3M@15fps;1080P@30fps,Main Stream/ 14μ x 24PCS
H.265+/H.265/H.264+/H.264 Compression Method
2.7-13.5mm 5X Motor Zoom Auto Focus Lens
IR Distance 30m Max /True WDR
IP66 Outdoor Metal Case /Internal POE



ZTIPB-F2M

CMOS Sensor "1/2.7
2MP 1080P
H.264/H.264+/JPEG/AVI /MJPEG
3.6mm / DWDR
42μ x 2PCS / Rectangular Zone 3
30M/ Metal , IP66
Support ONVIF 2.4





ZTIPB-PTZ4X

SONY Low Illumination 2.1MP CMOS Sensor 1/2.9"
HISILICON Hi3516C
H.265/H.264 Compression Method
4X Optical Zoom f=2.8mm-12mm
IP66 Outdoor/ IR Distance 30m
Main Stream:3M@15fps; 1080P@30fps
DWDR /Internal POE + USD8



ZTIPB-ST2MAF-60M

SONY Starvis Back-illuminated CMOS Sensor HISILICON 1/2.8 "
Hi3516C/starlight /Internal POE/ 42μ x 6PCS
H.265+/H.265/H.264+/H.264 Compression Method
2.7-13.5mm 5X Motor Zoom Auto Focus Lens
True WDR/ IR Distance 60m Max
IP66 Outdoor Metal Case
3M@15fps;1080P@30fps,Main Stream



ZTIPB-Alarm

Sound-Light Alarm Bullet Smart IR
SONY Starvis Back-illuminated CMOS Sensor 1/2.8"
H.265+/H.265/H.264+/H.264 Compression Method
External SD Card Slot / 3MP Fixed Lens 6mm
Internal POE / Support White light LED
True WDR / With Internal POE and SD Card Slot
Main Stream: 1080P@30fps;3MP HD Lens



ZTIPD-ST200

SONY Starvis Back-illuminated CMOS Sensor/starlight 1/2.8"
3M@15fps;1080P@30fps,Main Stream
H.264/H.264+/H.265/H.265+/JPEG/AVI /MJPEG
2.8mm / SD Card Slot/ 14μ x 18PCS
IR max 20M /Support ONVIF 2.4
Rectangular / True WDR 3
External Audio & hardware reset /Metal , IP66/ Internal POE



ZTIPD-STV200

SONY Starvis Back-illuminated CMOS Sensor/starlight 1/2.8"
3M@15fps;1080P@30fps,Main Stream
H.264/H.264+/H.265/H.265+/JPEG/AVI /MJPEG
14μ x 24PCS/ 2.8-12mm /Metal , IP66
Internal POE/ 30M /Support ONVIF 2.4
SD Card Slot/ True WDR
External Audio & hardware reset





ZTIPB-ST200

SONY Starvis Back-illuminated CMOS Sensor 1/2.8"
 3M@15fps; 1080P@30fps; 3MP F1.6 HD Lens; Main Stream
 H.264/H.264+/H.265/H.265+/JPEG/AVI /MJPEG
 3.6mm /42μ x 2PCS
 30M / Support ONVIF 2.4
 True WDR
 Metal , IP66 / Internal POE & SD Card Slot



ZTIPB-STV200

SONY Starvis Back-illuminated CMOS Sensor/starlight 1/2.8"
 3M@15fps;1080P@30fps,Main Stream
 H.264/H.264+/H.265/H.265+/JPEG/AVI /MJPEG
 2.8-12mm
 42μ x 4PCS /40M / SD Card Slot
 Support ONVIF 2.4 / True WDR
 Internal POE / Metal , IP66



ZTIPD-OV5M

OV 5M High-resolution CMOS Sensor HISILICON Hi3516D 1/2.7"
 H.264/H.264+/H.265/H.265+ Compression Method
 with external Audio & hardware reset cable/ 2.8mm Fixed Lens
 With Internal POE / IR Distance 20m Max
 IP66 Outdoor Metal Case
 5MP HD Lens /TRUE WDR /SD Card Slot
 Main Stream:5MP@15fps, 4MP@25fps,1080P@30fps



ZTIPD-OV5M-V

OV High-resolution CMOS Sensor 1/2.7"
 H.264/H.265 Compression Method
 2.8-12mm Varifocal Lens / IP66 Outdoor Metal Case
 HISILICON Hi3516D / POE
 True WDR/ With IR-CUT, IR 30m Max / With Internal
 Main Stream:5MP@15fps, 4MP@25fps,1080P@30fps; 5MP HD
 Lens SD Card Slot , with external Audio & hardware reset cable



ZTIPB-OV5M

OV High-resolution CMOS Sensor 1/2.7"
 H.264/H.265 Compression Method
 3.6mm Fixed Lens / IR Distance 40m Max
 POE / IP66 Outdoor Metal Case
 HISILICON Hi3516D,; With IR-CUT, / Ture WDR
 Main Stream: 5MP@15fps, 4MP@25fps,1080P@30fps; 5MP HD
 Lens With Internal /External SD Card Slot





ZTIPB-OV5M-AF

OV High-resolution CMOS Sensor HISILICON Hi3516C 1/2.7 "
 H.264/H.264+/H.265/H.265+ Compression Method
 2.7-13.5mm 5X Motor Zoom Auto Focus Lens
 External SD Card Slot/ IR Distance 40m Max
 Internal POE / IP66 Outdoor Metal Case
 5MP@15fps;4MP@25fps;1080P@30fps,Main Stream
 5MP HD Lens /42μ x 4PCS /True WDR



ZTIP-PTZ165

2M Panasonic Low Illumination 2MP CMOS Sensor@ 1/3 "
 H.264/H.265 Compression Method
 36X Optical Zoom f=4.6mm-165mm
 IR Distance 150m Max
 IP66 Outdoor



ZTIP-PTZ86M

2M SONY Starvis Back-illuminated CMOS Sensor 1/2.8 "
 H.265/H.264 Compression Method
 22X Optical Zoom f=3.9mm-85.5mm
 IR Distance 60m Max
 IP66 Outdoor

NVRS



ZTN-4CH1080P-H264H1

Video input : support 4CH 1080P pure HD network video input
 H.264 / Browsers : Support IE、Chrome、Firefox、Safari
 Network : Powerful network services (support DHCP, PPPOE
 FTP / DNS, DDNS, EMAIL, IP searches etc.) And perfect support ,
 WEB, Client, SDK), easy to achieve interoperability)
 Audio compression G.711A / HDD 1 SATA
 Video output 1ch HDMI,1chVGA Full HD output



ZTN-8CH1080P-H264H1

Video input : support 8CH 1080P pure HD network video input
 Browsers : Support IE、Chrome、Firefox、Safari
 Playback quality: Supports full real-time encoding video
 full real-time playback of multi-channel synchronous decoding
 Video input IP 8*1080P、8*720P / HDD 1 SATA
 Video output 1ch HDMI,1chVGA Full HD output
 Audio compression G.711A





ZTN-16CH4MP-H265H2

Video input : support 16 channel 5MP、32 channel 1080P
IP cameras HD network video input
Main processor Industrial-grade embedded HiSilicon CPU
Video input IP 16*5MP、32*1080P
Audio compression G.711A / HDD 2SATA
Video output 1ch HDMI,1chVGA Full HD output
Audio compression G.711A



ZTN-16CH1080P-H264H1

Video input : support 16 ch 1080P、16 ch 960P、4 CH 5MP
pure HD network video input / HDD 1 Sata
Main processor Industrial-grade embedded HiSilicon CPU
Operating System Embedded Linux
Video input IP 16*1080P、16*960P、4*5MP
Video output 1ch HDMI,1chVGA Full HD output
Audio compression G.711A



ZTN-32CH1080P-H264H2

Video input : support 32 ch 1080P、16CH 3M pure HD
network / video input / Video input IP 24*1080P/16*3M、8*5M
Audio compression G.711A / HDD 2 SATA
Video output 1ch HDMI,1chVGA Full HD output
Operating System Embedded Linux
H.264 High Profile compression algorithm
Supports full real-time encoding video



ZTN-32CH-H.265

Video input: support 32 CH*5MP/ 16 CH*3MP/ 8 CH*4K pure
HD / network video input / Video Input IP 8*4K/32*5M/16*3M
Audio Compression G.711A / HDD 8*SATA Up to 8TB
for each disk Video Output 1ch HDMI
Operating System Embedded Linux / 1ch VGA Full HD Output
H.265 High Profile compression algorithm
Forwarding bandwidth 307Mbps /Access bandwidth 384Mbps



ZTN-64CH-H.265

Video input: support 64 CH*1080P/ 36 CH*4MP/ 24 CH*5MP
pure / HD network video input / H.265 High Profile compression
algorithm Video Input IP 24ch*5M/36ch*4M/64ch*1080P
Video Compression H.265/H.264
HDD 8*SATA Up to 8TB for each disk
Video Output 1ch HDMI, 1ch VGA Full HD Output
Audio Compression G.711A / Operating System Embedded
Linux



The image shows three white plastic components of an intrusion system against a grey background. On the left is a tall, rectangular sensor unit with a recessed area near the top. To its right is a circular, multi-layered component, possibly a lens or a protective cover, with a central circular opening and radial ridges. In the foreground, centered below the other two, is a shallow, circular white cap or base. A semi-transparent grey horizontal band is overlaid across the middle of the image, containing the text "Intrusion Systems" in white.

Intrusion Systems

Wired Intrusion



Eclipse 32

- 8 undependable areas
- Up to 32 zones with freely programmable parameters
- Flexible programming via keyboard or ProsTE software
- 3 different programming modes
- Up to 30 devices connected to the system bus
- Wide range of detectors, periphery devices and communication modules



Eclipse LED16A

- Indication for 16 zones and 3 partitions
- Shortcut buttons to additional menus – Memory
- Quick buttons for all arming modes
- 3 fast buttons' combination for sending of PANIC, MEDICAL and FIRE alarm messages to a central monitoring station
- Supports 2 programming types: by addresses and by operations /Adjustable intensity of backlight for the display and buttons /Adjustable buzzer volume



Eclipse WL

- MHz Band 868
- Two way communication
- Frequency agility
- Up to 16/32 wireless detectors depends on the control panel
- Up to 32/64 remote controls depends on the control panel
- Mounting in SB-U small plastic box



Eclipse LCD32 / PR

- Indication for 32 zones and 8 areas
- Shortcut buttons to additional menus - Memory
- Troubles display and Bypassed zones / Quick buttons for all arming modes / 3 fast buttons' combination for sending of paniv, medical and FIRE alarm messages to a central monitoring station / Text display for 2x16 symbols organized into two rows /Supports 3 programming types: by addresses by operations and text menus





TTE LAN

Internet remote programming
 Micro USB port for configuration with ProsTE software
 Serial communication with ECLIPSE series control panels
 8 programmable inputs/outputs, OC type (up to 100 mA each)
 Main and Backup IP for connection with AJAX SP PRO
 Automatic (DHCP) or manual settings for network connection
 Suitable for home automation
 Control panel communication supervision



TITAN AG

90° coverage area in 54 zones
 Operation range from 1.5m to 15m
 OptoMOS output / Temperature compensation
 High white light immunity / LED indication
 Electrostatic Immunity / RF Immunity
 PET immunity: small animals up to 12kg
 Reverse polarity protection / Sensitivity adjustment



TITAN GB

Dual technology (PIR + GB) detector
 (Pulse count adjustment (for PIR and GB parts
 sensitivity adjustment for both PIR and GB elements
 White light immunity / Auto temperature compensation
 RF immunity / Electrostatic immunity
 pet immunity up to 12 kg
 Reverse polarity protection



ZT-PIRC

Auto sensitivity adjustment function
 Rear side detection 360° rotatable
 Selectable alarm contact
 Selectable direction of detection
 Protection range wide angle 10m, 84



AUMS-12S

Surface mounting with screws or
 twin adhesive tape
 N/O for closed loop systems
 Contact distance - up to 20-25mm
 Lead wires length - 400mm





Eclipse Zone 8

Connection directly to the system bus
8 additional zone inputs with freely programmable parameters
Additional PGM output, 100mA, OC type open collector
Mounting in the panel's box or in a separate small universal plastic box SB-U



SensoMAG M40 INTR

Digital process algorithm
Automatic drift compensation
Detects temperature over 58°C or change in temperature for a period of time / Low profile design
LED indication with 360° visibility
Sensor status indication on every 8 seconds
combined optical-smoke and rate-of-rise fire alarm detector



SR 105

Sound output - 105 dB/1m
Piezo speaker
Blue flash
Plastic enclosure



SR 400

Piezo speaker /Plastic housing
Built-in tamper
Built-in spirit level
Selectable sound output - 85 dB/1m; 105 dB/1m
Built-in NiMH battery /Blue flash
Large flat cover for company sticker or logo (size up to 250x120mm)



SensoMAG S30 INTR

Optical-smoke fire alarm detector
Automatic drift compensation
Digital process algorithm
Low profile design
LED indication with 360° visibility
Sensor status indication on every 8 seconds





SensoMAG R20 INTR

rate-of-rise temperature fire alarm detector
Digital process algorithm
Detects temperature over 58°C or change in temperature for a period of time
LED indication with 360° visibility
Sensor status indication on every 8 seconds
Low profile design

Wireless Intrusion



BRAVO EXT

Quick and easy mounting at the place of installation
Tamper-switch for self-protection of the box
Jumper for restoring of the factory settings RESET
LED indication for zone and system status
2 internal slots for mounting of communication module
8 remote key-fobs / 1 zone
1 built-in and 1 outdoor siren / Memory log for 300 events



BRAVO MC

Quick and easy mounting at the place of installation
Suitable for protection of doors and windows
Tamper-switch for self-protection of the box
Button for restoring of factory settings RESET
1 hardwire zone
Plastic pads for the magnet in case of mounting on metal surfaces



BRAVO RC

Quick buttons for ARM and DISARM
1 programmable button ("Star" icon) available to be set for different operation: Stay ARM, Panic alarm or Siren checking
Information button for system status
LED and sound signalization for alarm events, system status and low battery of the remote key fob





BRAVO FD

combined detector optical smoke and heat
Quick and easy mounting at the place of installation
Tamper-switch for self-protection of the box
Button for restoring of the default factory settings RESET



BRAVO SR300 ALK

Suitable for outdoor mounting / Squawk functionality
Two-way tamper switch for self-protection of the box
Separate alarm notifications for intrusion and fire
Button for restoring the factory settings RESET
Internal metal cover for better protection
Plastic cover for protection of the electronic components
External power supply with adapter



BRAVO LAN

Indication for the network status and the status of the connection of the control panel /Internet remote programming and control through AJAX SP PRO/MobileTTE
iOS/Androidapplicati /Suitable for home automation)
6 programmable inputs/outputs, OC type up to 100 mA each
Main and Backup IP for connection with AJAX SP PRO
Automatic (DHCP) or manual settings for network connection



BRAVO PSTN VD

Built-in mounting in the panel's box
telephone numbers for sending messages for events 4
2GB Micro SD card for storing of the recorded messages
Personal User recording of the name of the protected site
Remote control using voice navigation (ARM/ DISARM) and reporting for the system status
Direct programming via ProsTE software
Remote control and programming via user web interface AjaxWEB



BRAVO PIR

Coverage angle 90 °
Radio distance (open space) Up to 400 m
Quick and easy mounting at the place of installation
Tamper-switch for self-protection of the box
Button for restoring of factory settings RESET
Double knock" operation mode for reducing of false alarms"
Mounting on bracket – option



Beams Detector



ZT2B-60M

advanced weather protection & durability
External light protection
Beam Alignment and sensitivity control
wide angle adjustment
protection range : 60 m outdoor / 120 m indoor



ZT2B-100M

advanced weather protection & durability
selectable 4-channel beam frequency
Beam Alignment and sensitivity control
External light protection
protection range : 100 m



ZT4B-200M

digital quad beam covers up to 200 m
environmental disqualification out put
IP construction of 55 with quad tamper function
power status check by LED
setting notification by tone indicator
anti-dew / anti-insect cover
alarm memory up to 24 hours



ZTT-1M / ZTT-1.5M / ZTT-2M

available in 1.0 m- 3.0 m / one side or double side protection
UV resistant polycarbonate cover
extruded anodized aluminum tower
ant-sabotage tamper switch
compatible with all SASO beam detectors
optional brackets and accessories available





Fire Alarm



Conventional



MAG 2P

2 monitored siren outputs - 300 mA each
fire" and 1 "fault" relay output" 1
2 fully monitored fire zones with up to 32 fire alarm
detectors and unlimited number of call points
Active EOL allowing continuous monitoring of inputs
LED indication / "One man" zone testing
Plastic box / Multilanguage front panels



MAG 4

2 monitored siren outputs 300 mA each
4 fully monitored fire zones with up to 32 fire alarm detectors
and unlimited number of call points
fire" and 1 "fault" relay output" 1
Active EOL allowing continuous monitoring of inputs
Security key / "One man" zone testing
Metal box/Multilanguage suppo /LED indication



MAG 8

2 monitored siren outputs - 24V/ 0.5A each
8 fully monitored fire zones with up to 32 fire alarm detectors
and unlimited number of call points per zone
Double knock / Supports relay expander and LOG module
Active EOL allowing continuous monitoring of inputs
Multilanguage support /LED indication / Siren delay
Security key / Plastic box/"One man" zone testing



MAG 8 Plus

8 Double knock mode / to 16 zones, expandable
4 Siren delay / monitored siren outputs - 300 mA each
Supports up to 512 detectors and unlimited callpoints
Supports relay expander and LOG module
Active EOL allowing continuous monitoring of inputs
Levels of access protected by means of key
Plastic box / Simple programming by means of jumpers
Multi language front panels






SensomAG S30

Detects temperatures over 60°C, class A2S
Heat Detector
Digital process algorithm
Low profile design
LED indication with 360° visibility
Sensor status indication on every 8 seconds
EN54 - 5 certified




SensomAG F10

Auto compensation
Smoke Detector
Digital process algorithm
Low profile design
LED indication with 360° visibility
Sensor status indication on every 8 seconds
EN54 - 7 certified

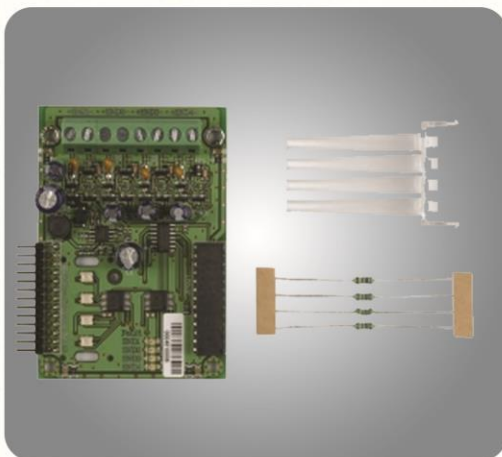

ME4

Zone circuits: 4
Instant action mode for zones
LED indication for zone circuits
Detectors per zone / max. number of detectors
128 /32

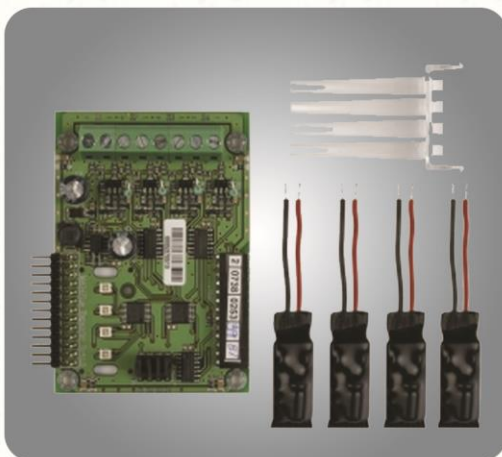

MS4

LED indication for troubles in the
sounder circuit
LED indication for sounders status
Sounders per circuit / max. number of
sounders/: 1/4
Sounder circuits: 4





SensoMAG M40

Auto compensation
Heat and Smoke Detector
Digital process algorithm
Low profile design
LED indication with 360° visibility
Sensor status indication on every 8 seconds
EN54 - 5/7 certified



SensoMAG MCP50

Surface mounting
Resettable flexible element
LED indication
Special tool for resetting after alarm event
Optional protective plastic cover
EN54 - 11 certified
Rate of protection IP 40



SF105

Piezo sounder
Sound output - 105 dB
LED strobe
Plastic case



SF100 RSST

Piezo Loudspeaker type
tone types 32
sound levels selectable by jumpers 2
High (102dB) and Low (94dB)
Small and compact design



SF 200

Sound output - 96 dB
LED strobe
Status indicator
Plastic case
IP54 protection for electronics





Time Attendance Access Control

Finger Print



ZTF-10

Fingerprint capacity : 1000
Record capacity : 100,000
Lcd : 2.8'inch TFT; With access control
Verify mode : fingerprint, Pin
connect mode : USB、RS485、TCP/IP、 U-disk
working voltage/current : 9V/1A



ZTF-20CB

Fingerprint capacity : 3000
Record capacity : 100,000 / Card capacity: 3000
Lcd : 2.8'inch TFT; With access control
Verify mode : fingerprint, Pin , ID card
connect mode : USB、RS485、TCP/IP、 U-disk
working voltage/current : 9V/1A
lock control delay : WG26/34 output



ZTF-30WB

Fingerprint capacity : 3000 can extend 5000
Record capacity : 100,000
Lcd : 2.8'inch TFT; With access control
Verify mode : fingerprint, Pin , ID card
connect mode : USB、RS485、TCP/IP、 U-disk with battery
working voltage/current : 9V/1A
lock control delay : WG26/34 input



ZTF- 40FB

Face capacity : 1000 / Display : 2.8inch TFT
Fingerprint capacity: 5000 / Card capacity: 5000
Record capacity : 300,000 With access control
Camera : double HD Infrared camera
Verify mode : face,fingerprint, password, ID card
Communication : USB/U-disk/TCP/IP, cloud optional
with battery Voltage/current : DC9V~12V/1 A



Access Control



ZTF-60FT

Face capacity : 1500
Fingerprint capacity: 5000 / Card capacity: 5000
Record capacity : 500,000
Display : 4.3inch touch TFT
Camera : double HD Infrared camera
Verify mode : face,fingerprint, password, ID card
Communication : U-disk/TCP/IP, cloud optional



ZTA-70

Fingerprint capacity : 3000
Response time : $\leq 0.8s$
Record capacity : 100,000 / Display: 2.8inch TFT lcd
Verify mode:fingerprint, ID card mifare option
/Communication : RS485/USB disk upload download/TCP/IP
cloud / optional,WIFI optional
Function : standard WG26/34 / Output /relay output/ BELL



ZTF-50F

Face capacity : 1000
Fingerprint capacity: 5000 / Card capacity: 5000
Record capacity : 300,000
Display : 2.8inch TFT
Camera : double HD Infrared camera
Verify mode : face,fingerprint, password, ID card
Communication : USB/U-disk/TCP/IP, cloud optional



ZTA-80FT

Fingerprint capacity : 1000 / Card capacity: 1000
Record capacity : 100,000 Lcd : 2.8'inch touch TFT
Camera : double HD Infrared camera
Verify mode : face、fingerprint、Pin , ID card mifare option
Connect mode : RS485、TCP/IP(P2S)、U-disk
Function : set time peiod、group, WG26/34
Face capacity : 1000 / Input output ; relay output/ BELL



ZEROTECH
ETPA-60W-PRO Mixer Amplifier

Sound Systems

ZEROTECH

Amplifiers



ZTPA-60W-mini

Wireless Bluetooth playing
Voice recording function AUX mode
Playing of USB/SD mobile storage media
One channel of stereo line input/output
External connection to 12-24V DC power supply
Aluminum-alloy casing, small volume and portable
High-performance and protection measures for overheating



ZTPA-60W-PRO

60W Mini Mixer Amplifier
Support both AC & DC 24V power supply
Mp3 player, FM radio & bluetooth with USB input on front panel
Rated power output at 35W, 60W
Speaker output of 100V or 70V & 4Ohms-8 Ohms-16 Ohms
LED indicators for power, clip, protect and signal
With short-circuit, clip, overload and high temp protection



ZTPA-120W6Z

120W Mixer Amplifier
MP3 ,radio playing function
Plugged with U disc, SD card and other memory equipment
Two microphone inputs, and one Line output for link
Transform the output into 6 zones
Individual volume control. Bass and treble tone control
A five-element LED level meter



ZTPA-250W6Z

MP3 player, FM tuner, partitioner 6 partitions
250W and Music Mixer
Individual volume control
6-zone output / Treble and Bass control
Chime with priority output
5-unit LED Meter for monitoring volume output in each zone
Output short circuit protection and caution





ZTPA-20W-mini

2x10W , Bluetooth
On-wall Stereo Music Amplifier
Audio format : MP3, WMA, WAV, FLAC, etc
Memory card capacity : 128MB-32GB
Power supply : AC 100-240V/50-60Hz
Frequency response : 20Hz -20kHz
Product dimension : 86*86*38MM L*W*H

Speakers



ZTPA-6WC

Built-in 100v/70v transformer
In-ceiling type loudspeaker
paper cone driver unit "6.5
Rated power output at 5W-8W
High sensitivity 93±2dB
Max SPL 1m, 98±2dB
Fast installation by spring clip



ZTPA-10WCBass

10W 6.5" Frame-less Coaxial Ceiling Speaker
Rated Voltage 100V
Sensitivity (1m, 1W) 93±2dB
Max. SPL(1m) 103±2dB
Frequency response 90Hz-18KHz
Dimension of product Φ190×80mm
Weight 1.0kg



ZTPA-30WWM


30W Wall Mount Speaker with Power Tap
Focus on sound quality ,inverse -phase type design
equipment with (high -low) pitchdouble unit
clear sound level ,mellow,transparent,clear and bright
strong bass
Rear power adjustable ,knob ,free choice of input mode
Fashion minimalist design aesthetic atmosphere white, black





ZTPA-BC20W

Active Ceiling Speaker 2*10w
 Bluetooth 4.0 wireless connection, music play arbitrary
 Built-in amplifier in the main box, can realize two-channel stereo play with the sub-box
 Conforms to the IEC 268-5 PHC standard, capable of operating for 100 hours at rated power for analogue acoustic feedback exposure (SAFE) testing

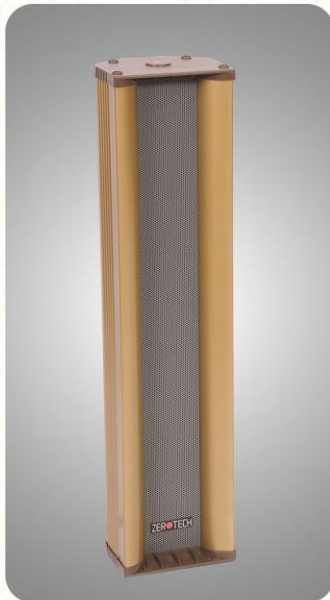

ZTPA-20WCO

20W Two-way Waterproof Column speakers
 The products have gotten waterproof certificates and other certificates and are suitable for outdoor use
 the net cover is made of aluminum and would not rot
 the speaker units have the features of sensitivity and high dynamic range
 the speaker is the construction of dual-crossover



ZTPA-MIC

Dynamic Desktop Microphone
 With full anti-interference
 Anti - electromagnetic interference and anti-mobile phone interference help the microphone avoid whistling or noise from the microphone
 With switch impact eliminated Some special technology is applied for eliminating noise when switching on/off the microphone. And it also avoids damage to the microphone
 With good frequency, high-fidelity Applying a special high-quality heart-shaped and ultra-pointing to the microphone core, coupled with a reasonable electro-acoustic circuit to make frequency response more broad and flat, producing high fidelity clear and charming voice





Intercom



ZEROTECH
Now App Has Screen

Intercom



ZTI-Vlite

7 Inch Video Door Phone & Cam With Infra-red
Button for unlock door
Illumination: 0.1 LUX
Cam with infra red



ZTI-C4line

CMOS Color Lens 1/3
Illumination: 0.1Lux, 300mm from camera
diagonal 120 degrees, Angle Of View is 90 degree
infrared night vision, Alloy+plastic material 6
Connection:4-core screened cable, 4call button
External dimensions:275x 123 x 12mm



ZTI-C10line

CMOS Color Lens 1/3
Illumination: 0.1Lux, 300mm from camera
diagonal 120 degrees, Angle Of View is 90 degree
infrared night vision, Alloy+plastic material
Connection:4-core screened cable, 10 call button
External dimensions:275x 123 x 12mm



ZTI-Spro

7inch color TFT display, Pixel:800*480
Can take and store 100pcs photo, Cycle Replace
Volume .brightness contrast adjustable
16pcs chimes for selection 14V,1.2A for adaptor
Touch button
Monitor Size:230×150 × 32mm





Certificate of Registration

This is to certify that the

Quality Management System
Of
ZEROTECH

VILLA 18, AL KHALIFA AL WASEK ST, ABBAS AL AKKAD, NASR CITY
CAIRO, EGYPT

Has been independently assessed and is
Compliant with the requirements of:

ISO 9001:2015

For the following scope of activities:

Import, Install, Technical Support & Supply Security Systems

Certificate Number: 19ACM6569Q

| | |
|--|-----------------------------|
| Date of initial registration | 04 th March 2019 |
| Date of this certificate | 04 th March 2019 |
| Certificate expiry (subject to the company maintaining its system to the required standard) | 03 rd March 2022 |

Authorised Signatory

This certificate is the property of ACM Limited and shall be returned immediately on request.
ACM Limited, Unit 5 Merus Court, Meridian Business Park, Leicester, LE19 1QW
+44 (0)116 240 5255 info@acmcert.com



HOW TO FIND US

Website: www.zerotechegypt.com

 Zerotechsurveillance


 ZerotechE

 ZeroTech Egypt

 ZeroTech Egypt

 ZeroTech Egypt

 HOT LINE: 16105

 002-02-20801114

 002-01025001940 , 002-01025001942 , 002-01025001941

Mails

Administration : info@zerotechegypt.com

Sales : sales@zerotechegypt.com

Marketing: marketing@zerotechegypt.com

Technical support : technicalsupport@zerotechegypt.com

Projects : projects@zerotechegypt.com

Maintenance : maintenance@zerotechegypt.com

Finance : finance@zerotechegypt.com

Careers : careers@zerotechegypt.com

